




INA GLCTE30 unit é s de roulement

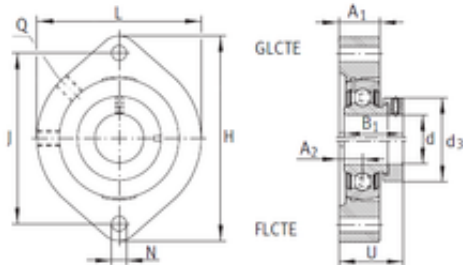

GLCTE30 Bearing 2D drawings and 3D CAD models

Bearing No. GLCTE30

Bore Diameter	30 mm
d	30 mm
U	38,1 mm
Thread (Q)	Rp1/8
d3	44 mm
A1	20,5 mm
B1	35,8 mm
H	112,5 mm
J	90,5 mm
L	84 mm
N	11,5 mm
A2	11,4 mm
Weight	0,76 Kg
Basic dynamic load rating (C)	19,5 kN
Category	Flange Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.911
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Flange Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion



GJ Manufacturing Co., Ltd.

Mounting Bolts	11.5 Millimeter
Relubricatable	Yes
Insert Part Number	GRAE30NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Pilot Configuration	No Pilot
Inch - Metric	Metric
Long Description	2 Bolt Flange Block; 30MM Bore; 90.5MM Bolt Circle; 90.5MM Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 35.7MM Length Thru Bore; Relubricatable; Double Lip Contact Sea
Other Features	Single Row Small Center Bolt With Set Screw
Category	Flange Block
UNSPSC	31171501
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Flanged
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	GLCTE30
Weight / LBS	1.676
Bolt Spacing	3.563 Inch 90.5 Millimeter
Length Thru Bore	1.406 Inch 35.7 Millimeter
Bore	1.181 Inch 30 Millimeter
Nominal Bolt Circle Diameter Round	3.6 Inch 90.5 Millimeter
Cartridge Pilot Depth	0 Inch 0 Millimeter
Cartridge Pilot Diameter	0 Inch 0 Millimeter